


## LEDs

5050 SMD – White

HL-8945

### Package Configuration

Descriptions:
Emitting Color: White
Device Outline: 5.0x5.0x1.5mm
Lens Type: Yellow Diffused

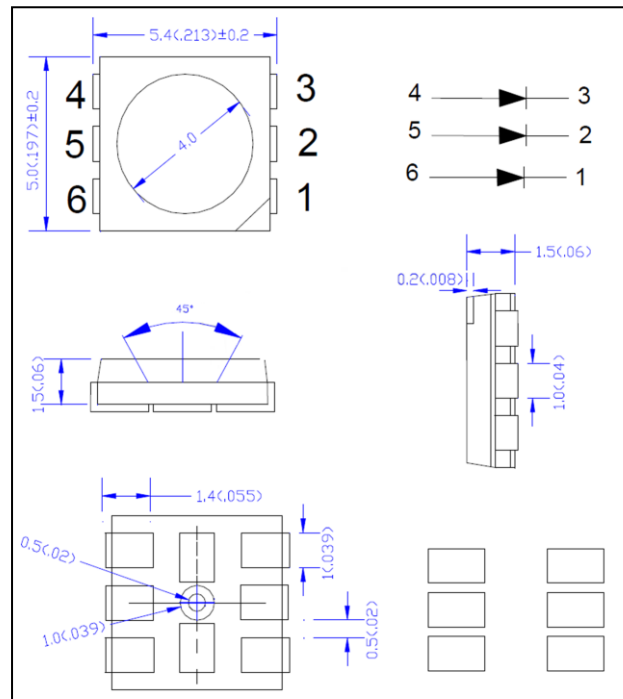

### Absolute Maximum Ratings (Ta=25°C)

Parameter	Max.	Unit.
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	60	mA
Reverse Voltage	5	V
Operating Temperature Range	-40 °C to +85°C	
Storage Temperature Range	-40 °C to +100°C	
Lead Soldering Temperature[4mm(.157") From Body]	250°C for 5 Seconds	

### Electrical and optical characteristics

Parameter	Symbol	Typ.	Unit.	Test Condition
Luminous Intensity	$I_v$	10000 mcd	mcd	$I_F = 3 \times 20 \text{mA}$
Viewing Angle	$2\theta_{1/2}$	120	deg.	
Color Temperature	CCT	3400	K	