


LEDs

0602 SMD Type – Red – side view

HL-9016

Package Configuration

Descriptions:
Emitting Color: Red
Device Outline: 1.65x0.60x1.15mm
Lens Type: Water Clear
Packing: 4kpcs/reel

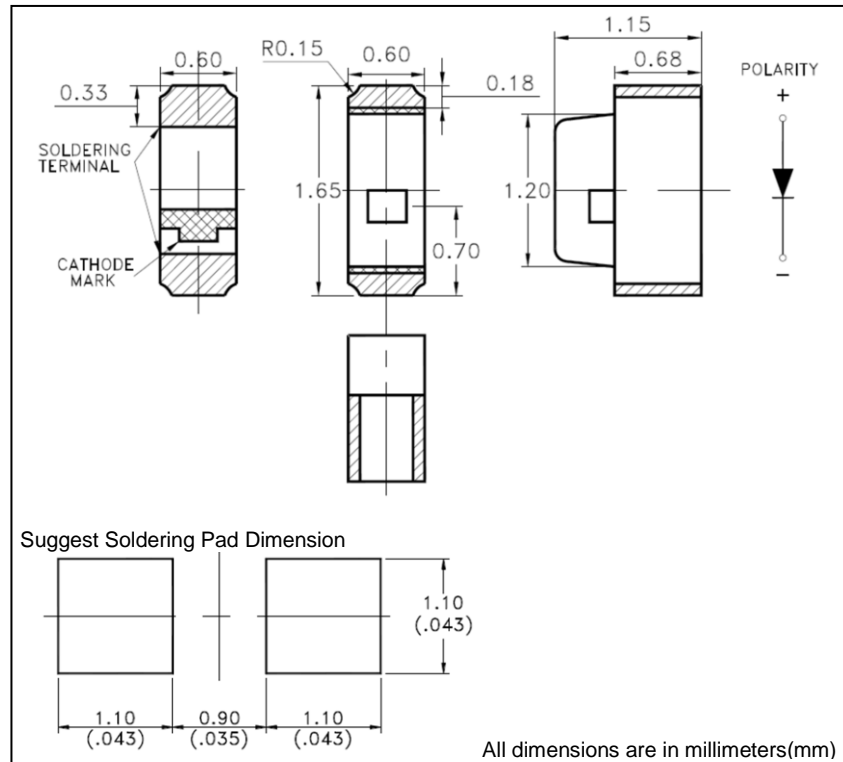

Absolute Maximum Ratings (Ta=25°C)

Parameter	Max.	Unit.
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	5	mA
Reverse Voltage	5	V
Operating Temperature Range	-40 °C to +85°C	
Storage Temperature Range	-40 °C to +100°C	
Lead Soldering Temperature[4mm(.157") From Body]	250°C for 5 Seconds	

Electrical and optical characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Test Condition
Luminous Intensity	I_v	-	60	-	mcd	$I_f=5mA$
Viewing Angle	$2\theta_{1/2}$	-	130	-	deg.	
Dominant Wavelength	Δd	-	630	-	nm	